




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C12M 1/00, 3/00, 3/04, C08J 9/26		A1	(11) International Publication Number: WO 97/08291
			(43) International Publication Date: 6 March 1997 (06.03.97)
(21) International Application Number: PCT/GB96/02070		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 23 August 1996 (23.08.96)			
(30) Priority Data: 9517717.6 31 August 1995 (31.08.95) GB 9526032.9 20 December 1995 (20.12.95) GB			
(71) Applicant (for all designated States except US): ASHBY SCIENTIFIC LTD. [GB/GB]; Unit 11, Atlas Court, Coalville, Leics. LE67 3FL (GB).			
(72) Inventor; and (75) Inventor/Applicant (for US only): FULLER, Jess, Paul [GB/GB]; Flat 7, 35 Nottingham Road, Ashby-de-la-Zouch, Leics. LE65 1DL (GB).			
(74) Agents: JUMP, Timothy, John, Simon et al.; Venner, Shipley & Co., 20 Little Britain, London EC1A 7DH (GB).			

Published

With international search report.

(54) Title: APPARATUS AND METHODS FOR CULTURING BIOLOGICAL MATERIAL

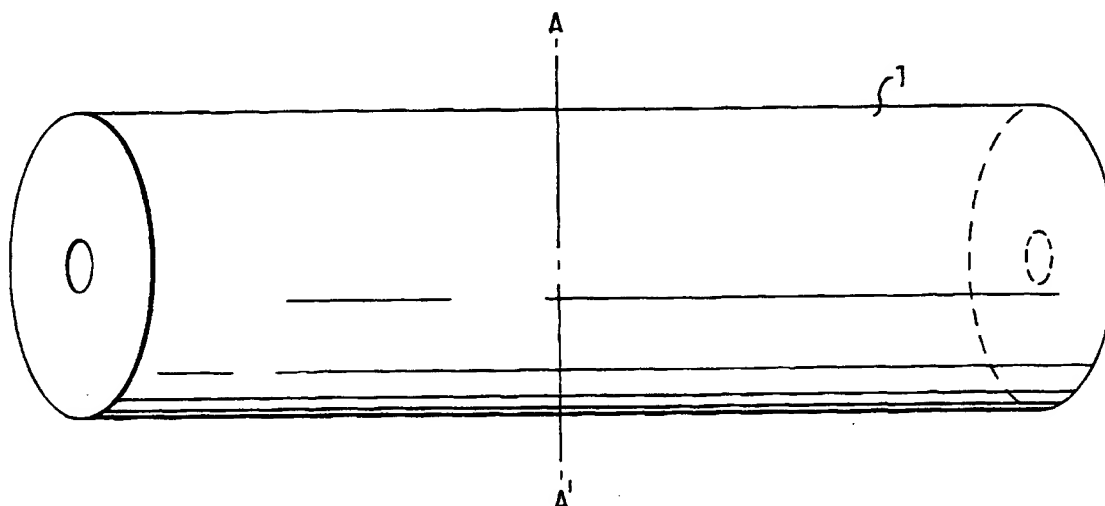

(57) Abstract

A method of providing a substrate with a textured surface comprising the steps of forming a mobile surface studded with a granular material on the substrate, setting the mobile surface and removing the granular material to leave a textured surface on said substrate, and apparatus for use in culturing micro-biological material comprising a substrate produced by such a method.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MZ	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

- 1 -

**APPARATUS AND METHODS FOR CULTURING
BIOLOGICAL MATERIAL**

DESCRIPTION

5

The present invention relates to vessels having textured surfaces for growing animal cells, plant cells, micro-organisms and the like ('bio-substances') and to methods for their production.

10

Many bio-substances can be propagated in vitro in containers such as so-called 'roller bottles', that is, cylindrical vessels, usually of glass or polystyrene, which are partially filled with a liquid medium comprising the bio-substances. The bottles are arranged to be rotated slowly about their longitudinal axes, promoting aeration, while the liquid medium provides nutrients to the bio-substances as they grow on the inner surfaces of the container.

20

Limitations in the efficiency of conventional procedures have hitherto been due to the relatively small surface area provided by the smooth interior of the container, as well as the fact that such surfaces do not provide optimum characteristics for the growth processes. It is an object of the present invention to eliminate or minimise these disadvantages.

- 2 -

Accordingly, in a first aspect of the invention, there is provided apparatus for use in a method of culturing micro-biological material, wherein said apparatus defines a rough or uneven growth surface arranged for contact
5 with micro-biological material being cultured. An advantage of the inventive apparatus is that its use can allow cultured material to be grown at enhanced rates.

Preferably, the growth surface is rendered rough or
10 uneven by surface features having a depth of 1mm or less and, preferably, a depth of 0.1-0.5mm. In preferred embodiments, the growth surface is pitted, or pockmarked with a plurality of craters or crater like depressions, preferably to depths of 1mm or less and more preferably
15 to depths of 0.1-0.5 mm. Preferably, the craters or crater like depressions measure less than 5, preferably less than 2, and more preferably less than 1mm across. Most preferably, the crater or crater like depressions measure less than 0.5mm across.

20

In further embodiments, the growth surface is micro-cupellated and it can be formed from an organic polymer. The polymer can be coated onto a supporting substrate and, preferably, is a silicone rubber. In an embodiment,
25 the growth surface forms an inner surface of a container for retaining biological material being cultured.

In a second aspect, the invention provides a method of

culturing a micro-biological material, comprising culturing said material using apparatus defining a growth surface, wherein said material is in contact with the growth surface and the growth surface is uneven or rough.

5 Advantageously the inventive method allows biological material to be grown at an enhanced rate.

Preferably, the apparatus employed in the second aspect of the invention is in accordance with its first aspect.

10

In a third aspect, the invention provides a method of providing a substrate with a textured surface comprising the steps of forming a mobile surface studded with a granular material on the substrate, setting the mobile

15 surface and removing the granular material to leave a textured surface on said substrate.

In a fourth aspect of the invention, there is provided an article having a textured surface that can be obtained by

20 a method according to the invention in its third aspect. Preferably, the article is a tissue or cell culture vessel, such as a roller-bottle.

In all aspects of the invention the biological material

25 preferably comprises tissue, cells or like matter, including viral particles or virions.

In the invention according to its fourth aspect, the

mobile surface is preferably tacky prior to the setting step, so as to promote adherence of the granular material. In a preferred embodiment, a (preferably solvent-less) silicone paint, designed for polymerisation
5 to form silicone rubber, is applied to the interior surface of a glass or polystyrene roller bottle. While the coating is still in liquid form, common salt particles are injected into the container, for example, under pressure, to adhere to the prepared silicone
10 coating, with any excess salt being removed again from the container. The coating is then allowed to polymerise into a solid layer at ambient or elevated temperature, depending on the type of silicone used. When hardened, the salt particles adhering to the coating are removed by
15 dissolution in water, to leave a surface-porous layer exhibiting a cratered or micro-cupellated structure, as well as the special affinity for bio-substances of silicone rubber. The container so prepared is found to result in a greatly increased yield when used for growth
20 processes in the manner described.

To promote adhesion of the silicone rubber layer within a glass or polystyrene container, a conventional adhesive, preferably a mineral spirit based primer, can
25 be first applied to the surface prior to deposition of the silicone layer.

In embodiments of the invention, it is a pre-requisite

that the growth surface should be non-toxic and inert in respect of bio-substances and liquid media. The method of creating such surfaces should not involve any materials, which if remaining on the surface as impurities, could
5 have a deleterious effect on the growth process.

In the above described method, various types of particles can be used in place of common salt, such as, for example, sugar, saltpetre and the like; however, common
10 salt is preferred as being non-toxic and inert in respect of normal media and bio-substances, as well as being soluble in water for subsequent removal. Solubility of the particles in a non-toxic solvent is an important factor in their choice.

15

Attempts have been made to use 'open-porous' silicone rubbers, such as the material 'Immobilasil' ('Immobilasil' is a registered trade mark); however, the results obtained were not as satisfactory as those achievable using the
20 various aspects of the present invention. The open-porous structure (that is, the presence of inter-connected pores within the body of the silicone rubber) in such known materials leads to difficulties in the subsequent harvesting of the biosubstances from the interstices of
25 the coating on completion of a growth cycle.

In an embodiment of the invention, surface pitting or cratering, for example, micro-cupels, can be produced in

the inner surfaces of glass or polystyrene containers per se. For this purpose, salt or other suitable particles are injected, for example, pneumatically, into the container while the latter is at elevated temperature, either during its manufacture or on subsequent heating. Upon cooling, the particles are then removed as described above, leaving the interior surface of the glass or polystyrene container with a textured, cratered or micro-cupellated structure, again resulting in enhanced efficiency of the process. In the case of polystyrene containers, prior to use, the standard procedure of plasma treatment of the inner surface can be applied to impart a negative electrical charge to the surface, as required for the growth process. Other types of particle can be used apart from salt, the latter however, being again preferred for the reasons enumerated.

It is evident that other methods lying within the ambit of the invention may also be used to derive surface porous, cratered or micro-cupellated textured surfaces of the nature described for growing of bio-substances. The invention can equally be applied to all suitable containers, such as, for example, flasks, tubes, trays, roller bottles, plastic bags and the like.

In applications where very large area growth surfaces are required, it is conventional to utilise containers which comprise flat plates, for example, of polystyrene, wetted

by the liquid medium, and upon which the bio-substances are made to grow. Such plates can also be provided with coatings of silicone rubber having a cratered or micro-cupellated, porous, surface structure according to the
5 invention, in the manner described above, to result in substantially enhanced productivity.

Thus, roller bottles and other containers according to the invention can have a specially textured, cratered or
10 micro-cupellated growth surface, usually an inner surface, suitable for use in the growth of bio-substances as aforesaid. By their nature, these surfaces are more conducive to the adhesion and growth of bio-substances, with resulting improved process efficiency. It is
15 considered that the larger surface areas provided by such growth surfaces is a factor in their enhanced performance.

In order that the invention may be better understood, an
20 example thereof will now be described by way of illustration only and with reference to the accompanying drawings, wherein:

Figure 1 is a schematic front perspective view of a
25 conventional roller bottle;

Figure 2 is a schematic side cross-sectional view of the roller bottle of Figure 1 along the line AA' after

partial treatment by the inventive method;

Figure 3 is a schematic side cross-sectional view of the roller bottle of Figure 2 after treatment by the
5 inventive method has been completed; and

Figure 4 is a schematic scrap view from a point on the axis of the roller bottle showing a portion of the growth surface after treatment by the inventive method has been
10 completed.

With reference to Figures 1 to 4, a polystyrene roller bottle 1 is provided with a cratered or micro-cupellated surface according to the inventive method as follows. To
15 the interior surface of bottle 1, a coating 2 of silicone rubber primer SS 4155 (General Electric Co., Connecticut, U.S.A.) is applied by brushing or other means and allowed to dry at 70°C for 15 minutes. A coating 3 of
silicone rubber paint RTV 118 (General Electric Co.,
20 Connecticut, U.S.A.), approximately 0.05 to 0.2mm in thickness, is applied to primer coating 2 and left to stand for 1 minute. A substantial quantity of common salt 4 is then introduced into bottle 1 until
approximately 1/3 full and the latter shaken, so that
25 salt 4 adheres to all of the paint coating 3. The excess salt 4 is removed and coating 3 allowed to cure at 70°C for 30 mins. Bottle 1 is then filled with boiling water and allowed to stand for 10 minutes before the water is

removed. This last step is repeated once before bottle 1 is rinsed with isopropyl alcohol and left to dry at 70°C for 30 mins. The resultant roller bottle 1 has a textured interior surface 5 provided by craters or micro-cupels 6 inset in silicone rubber layer 4.

The roller bottle 1 can then be inoculated with a biological material, for example cells taken from a commercially available cell line such as Madin Darby
10 Canine Kidney, suspended in an appropriate commercially available nutrient medium, such as Glucose Minimum Essential Medium containing 5% foetal calf serum, selected for its suitability for growing the chosen cells. The roller bottle can then be placed upon
15 conventional equipment designed to gently roll the bottle under conditions conducive to growing cells from the selected line. For example, a common culturing temperature is 37°C. After an appropriate culturing period, the growing cells can be harvested from the
20 roller bottle using conventional techniques, such as trypsinisation or mechanical scraping.

CLAIMS

1. Apparatus for use in a method of culturing micro-
5 biological material, wherein said apparatus defines a rough or uneven growth surface arranged for contact with micro-biological material being cultured.
2. Apparatus as claimed in claim 1, wherein the
10 growth surface is rendered rough or uneven by surface features having a depth of 1mm or less and, preferably, a depth of 0.1-0.5mm.
3. Apparatus as claimed in claim 1, wherein said
15 growth surface is pitted.
4. Apparatus as claimed in any of claims 1-3, wherein
a plurality of craters or crater like depressions are defined in the growth surface.
20
5. Apparatus as claimed in claim 3 or claim 4,
wherein the growth surface is pitted or cratered to depths of 1mm or less and, preferably, to depths of 0.1-0.5mm.
25
6. Apparatus as claimed in claim 5, wherein the craters or crater like depressions measure less than 2mm, preferably less than 1mm, and more preferably less

than 0.5mm across.

7. Apparatus as claimed in any of the preceding claims, wherein the growth surface is micro-cupellated.

5

8. Apparatus as claimed in any of the preceding claims, wherein the growth surface comprises an organic polymer.

10 9. Apparatus as claimed in claim 8, wherein the polymer is coated onto a supporting substrate.

10. Apparatus as claimed in claim 8 or claim 9, wherein said polymer is a silicone rubber.

15

11. Apparatus as claimed in any of the preceding claims, wherein the growth surface forms an inner surface of a container for retaining biological material being cultured.

20

12. A method of culturing a micro-biological material, comprising culturing said material using apparatus defining a growth surface, wherein said material is in contact with the growth surface and the growth surface
25 is uneven or rough.

13. A method as claimed in claim 12, wherein the apparatus comprises apparatus as claimed in any one of

claims 1-11.

14. A method of providing a substrate with a textured surface comprising the steps of forming a mobile
5 surface studded with a granular material on the substrate, setting the mobile surface and removing the granular material to leave a textured surface on said substrate.
- 10 15. A method as claimed in claim 14, wherein the mobile surface is tacky prior to setting.
16. A method as claimed in claims 14 or 15, wherein the mobile surface is formed by softening the substrate
15 and studding the softened substrate with a granular material.
17. A method as claimed in claims 14 or 15, wherein the mobile surface is formed by coating the substrate
20 with a layer of a surface-forming material and studding said layer with a granular material.
18. A method as claimed in claims 14 or 15, wherein the mobile surface is formed by coating the substrate
25 with a layer of a surface-forming material in admixture with a granular material.
19. A method as claimed in claims 17 or 18, wherein

the surface-forming material is a silicone rubber-forming material.

20. A method as claimed in claims 17, 18 or 19,
5 wherein the substrate is treated with an adhesive prior to coating with the layer of surface-forming material.

21. A method as claimed in any one of claims 14-20 the
preceding claims, wherein the substrate is a glass or
10 an organic polymer.

22. A method as claimed in any one of claims 14-21,
wherein the granular material is soluble and is removed
by dissolution.
15

23. A method as claimed in claim 22, wherein the
granular material is sucrose, salt or potassium
nitrate.

20 24. A method as claimed in any one of claims 14-23,
wherein the textured surface is cratered or micro-cupellated.


25. An article having a textured surface obtained or
25 obtainable by a method as claimed in any one of claims
14-24.

26. Apparatus as claimed in any of claims 1-11

comprising an article as claimed in claim 25.

27. A method as claimed in claim 12, wherein the apparatus comprises apparatus as claimed in claim 26.

5

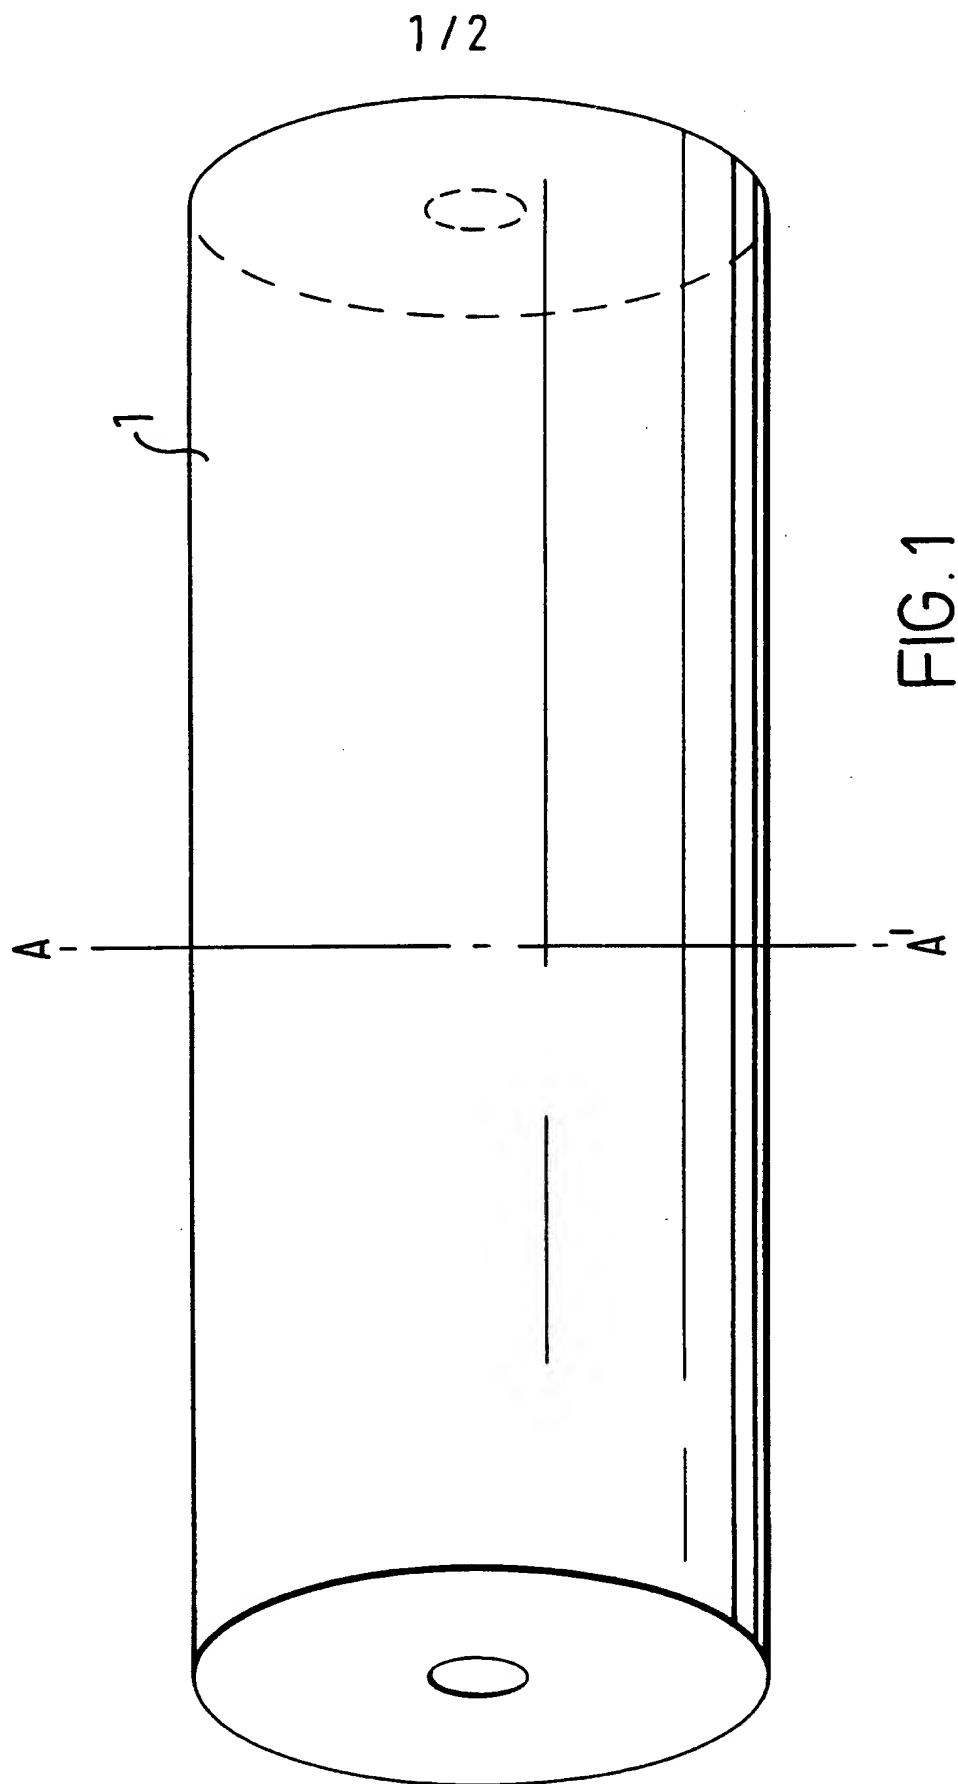

2 / 2

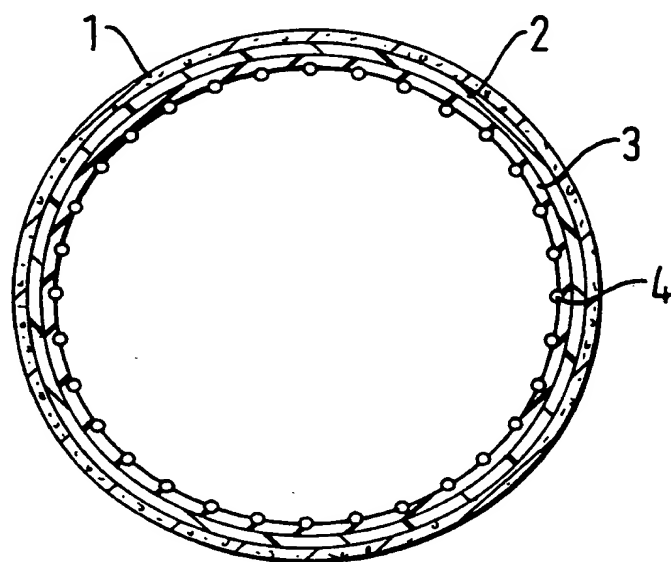


FIG. 2

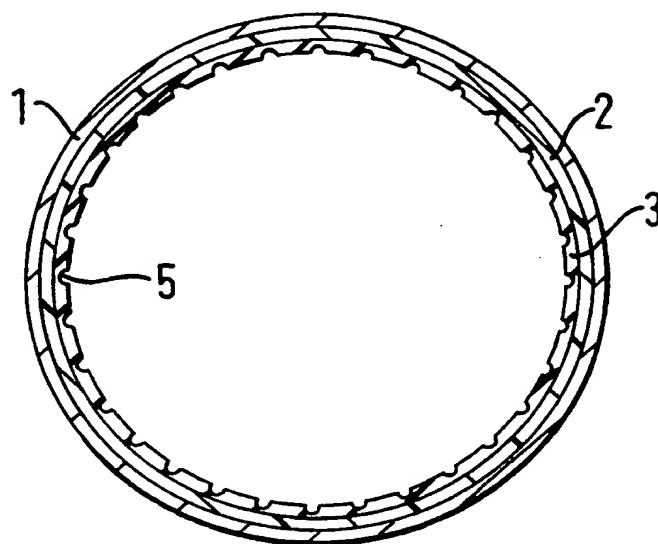


FIG. 3

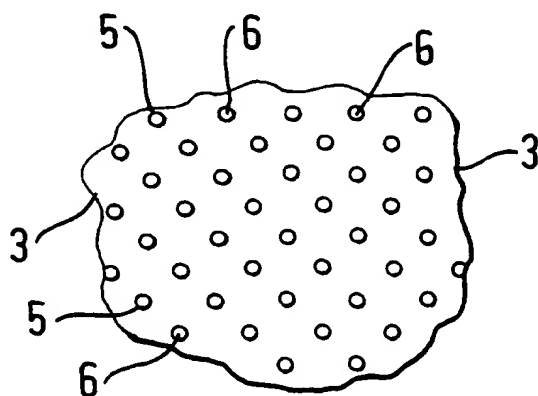


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 96/02070

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C12M1/00 C12M3/00 C12M3/04 C08J9/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C12M C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 41 32 379 A (KERNFORSCHUNGSZ KARLSRUHE) 8 April 1993 see claims; figures 1,2 ---	1-8, 11-13, 26,27
P,X	WO 95 24464 A (BAXTER INT ET AL) 14 September 1995 see claims 1-5 ---	1,2,8, 11-13
X	GB 2 262 538 A (CORNING INC) 23 June 1993 see claims 1-5; figures ---	1,2,8, 11-13
X	FR 2 522 014 A (PASTEUR INSTITUT) 26 August 1983 see claims 1,7-11,13-15; figures 1,2,5; example 2 ---	1-13,26, 27 9,10
Y		

	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

22 November 1996

Date of mailing of the international search report

29. 11. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Coucke, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/02070

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 912 058 A (MUSSI EDWARD F ET AL) 27 March 1990	1-8, 11-13, 26,27
Y	see claim 1; examples see column 5, line 37 - line 43; claims 1-10; figures	9,10
X	GB 1 092 634 A (IMPERIAL CHEMICAL INDUSTRIES LTD) 29 November 1967 see claims	1-6,8, 12,13, 26,27
X	US 4 320 198 A (MYNATT ROY L) 16 March 1982 see abstract; claims 1,2; figures	1-3,5, 12,13, 26,27
X	US 4 376 826 A (MYNATT ROY L) 15 March 1983 see abstract; claims; figures	1-3,5, 12,13, 26,27
P,X	DE 44 10 718 A (BODE CHEMIE GMBH & CO) 12 October 1995 see page 1, line 30 - line 33; claims 1-6	1,11-13, 26,27
X	DATABASE WPI Section Ch, Week 7637 Derwent Publications Ltd., London, GB; Class A85, AN 76-69743X XP002019186 & JP 51 087 578 A (MATSUSHITA ELEC WOR) , 1 August 1976 see abstract	14,18, 21,22, 24,25
Y	US 4 859 712 A (COX JAMES E) 22 August 1989 see the whole document	18,19
X	DATABASE WPI Section Ch, Week 8911 Derwent Publications Ltd., London, GB; Class A35, AN 89-079526 XP002019187 & JP 01 022 934 A (POLYPLASTICS KK) , 25 January 1989 see abstract	14-18, 21-25
Y	see abstract	19
X	US 4 284 275 A (FLETCHER HERBERT E) 18 August 1981	14-17, 20-25
Y	see abstract; claims	18,19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 96/02070

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-4132379	08-04-93	WO-A- 9307258 EP-A- 0605527 JP-B- 2511247 JP-T- 6507076	15-04-93 13-07-94 26-06-96 11-08-94
WO-A-9524464	14-09-95	AU-A- 2060195 CA-A- 2162465 EP-A- 0698085 US-A- 5512480	25-09-95 14-09-95 28-02-96 30-04-96
GB-A-2262538	23-06-93	US-A- 5272084 AU-B- 662371 AU-A- 2994392 CA-A- 2079569 EP-A- 0552412 JP-A- 6038734	21-12-93 31-08-95 24-06-93 19-06-93 28-07-93 15-02-94
FR-A-2522014	26-08-83	NONE	
US-A-4912058	27-03-90	DE-D- 69006624 EP-A- 0394713 IE-B- 63833 JP-A- 2303479 JP-B- 7028721	24-03-94 31-10-90 14-06-95 17-12-90 05-04-95
GB-A-1092634		NONE	
US-A-4320198	16-03-82	NONE	
US-A-4376826	15-03-83	NONE	
DE-A-4410718	12-10-95	NONE	
US-A-4859712	22-08-89	CA-A- 2000448 CH-A- 678946 DE-A- 3934149 FR-A- 2637537 GB-A,B 2225016 IE-B- 63980 IT-B- 1237813	12-04-90 29-11-91 19-04-90 13-04-90 23-05-90 28-06-95 18-06-93

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 96/02070

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4859712		JP-A- 2251544 NL-A- 8902531 SE-A- 8903340	09-10-90 01-05-90 13-04-90
US-A-4284275	18-08-81	NONE	